

AERO 1.6


Inverted mounted

Vent check valve for venting through superstructures, made for inverted mounting with inlet at the top. All AERO valves are self-draining, which prevents leakage into the tank.

Aero valves are approved by all the most common classification societies.

Options:

- ▶ Flame/Bug/Rat screen
- ▶ Heating/Winterization
- ▶ Additional mud chamber preventing mud from entering the valve (see page 29)
- ▶ Painting
- ▶ Mounting alternatives: flanged, threaded or weldment
- ▶ Can be ordered in galvanized steel, stainless steel or higher Duplex steel qualities

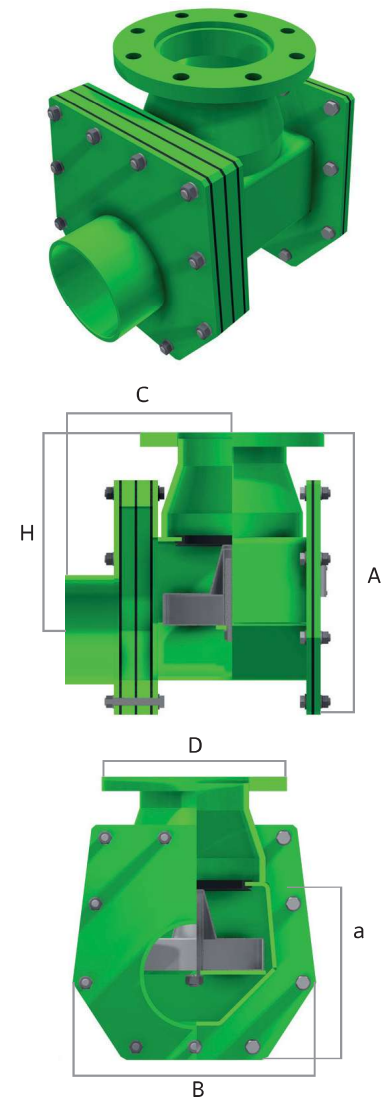

Performance, weight and size

Aero 1.6 Steel	DN – Inch											
	40 - 1 1/2"	50 - 2"	65 - 2 1/2"	80 - 3"	100 - 4"	125 - 5"	150 - 6"	200 - 8"	250 - 10"	300 - 12"	350 - 14"	400 - 16"
A (mm)	279	273	266	336	327	365	445	540	670	846	961	961
B (mm)	209	209	209	264	264	300	375	466	578	675	875	875
C (mm)	189	189	189	216	216	246	261	292	319	357	394	394
H (mm)	206	200	193	249	236	257	311	370	460	592	651	626
a (mm)	210	210	210	243	243	273	354	420	528	584	700	700
D	Flange connection acc. to any standard.											
Weight (kg)	24	24	25	36	38	47	76	111	182	221	221	221
Heating (Watt)	75	75	75	75	120	120	120	180	180	180	180	180
Inlet air flow in m³/h¹⁾	240	185	145	255	280	530	700	680	2830	4070	4850	7280
Inlet air flow in m³/h²⁾	320	320	155	255	280	530	700	1360	2830	4070	4850	7280

1) No screen 2) With screen

