

HIDE 2 ALUMINUM


through super structures

The HIDE 2 Aluminum is a die-cast valve made for ventilation through superstructures. Commonly used in demanding conditions and cases with longer distances to open deck, such as passenger vessels and accommodation areas.

HIDE valves are approved by all the most common classification societies. For pressure drop and flow rate, visit our web page www.gjerde.com

Options:


- ▶ Flame/Bug/Rat screen
- ▶ Heating/Winterization
- ▶ Additional mud chamber preventing mud from entering the valve (see page 29)
- ▶ Painting
- ▶ Mounting alternatives: flanged or threaded

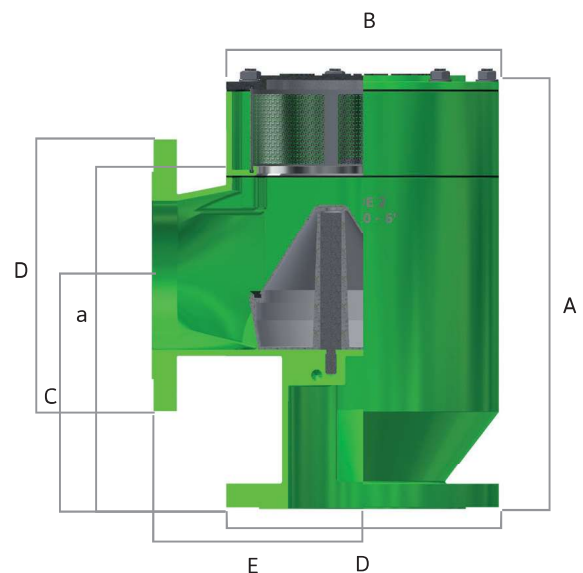


Performance, weight and size

Hide 2 Aluminum	DN – Inch								
	DN50 - 2"	DN65 - 2 1/2"	DN80 - 3"	DN100 - 4"	DN125 - 5"	DN150 - 6"	DN200 - 8"	DN250 - 10"	DN300 - 12"
A (mm)	234	277	307	354	420	454	518	728	847
B (mm)	140	160	194	210	250	285	340	430	520
C (mm)	116	144	162	202	225	242	260	383	440
E (mm)	130	150	180	200	220	250	300	350	420
a (mm)	179	208	243	270	315	354	370	550	663
D	Flange connection acc. to any standard.								
Weight (kg)	5	6	8	11	14	19	32	52	75
Heating (Watt)	75	75	75	120	120	120	180	180	180
Inlet air flow in m³/h¹⁾	106	143	235	283	530	955	1585	3005	3815
Inlet air flow in m³/h²⁾	113	143	235	283	575	1020	1245	3005	3815

1) No screen 2) With screen

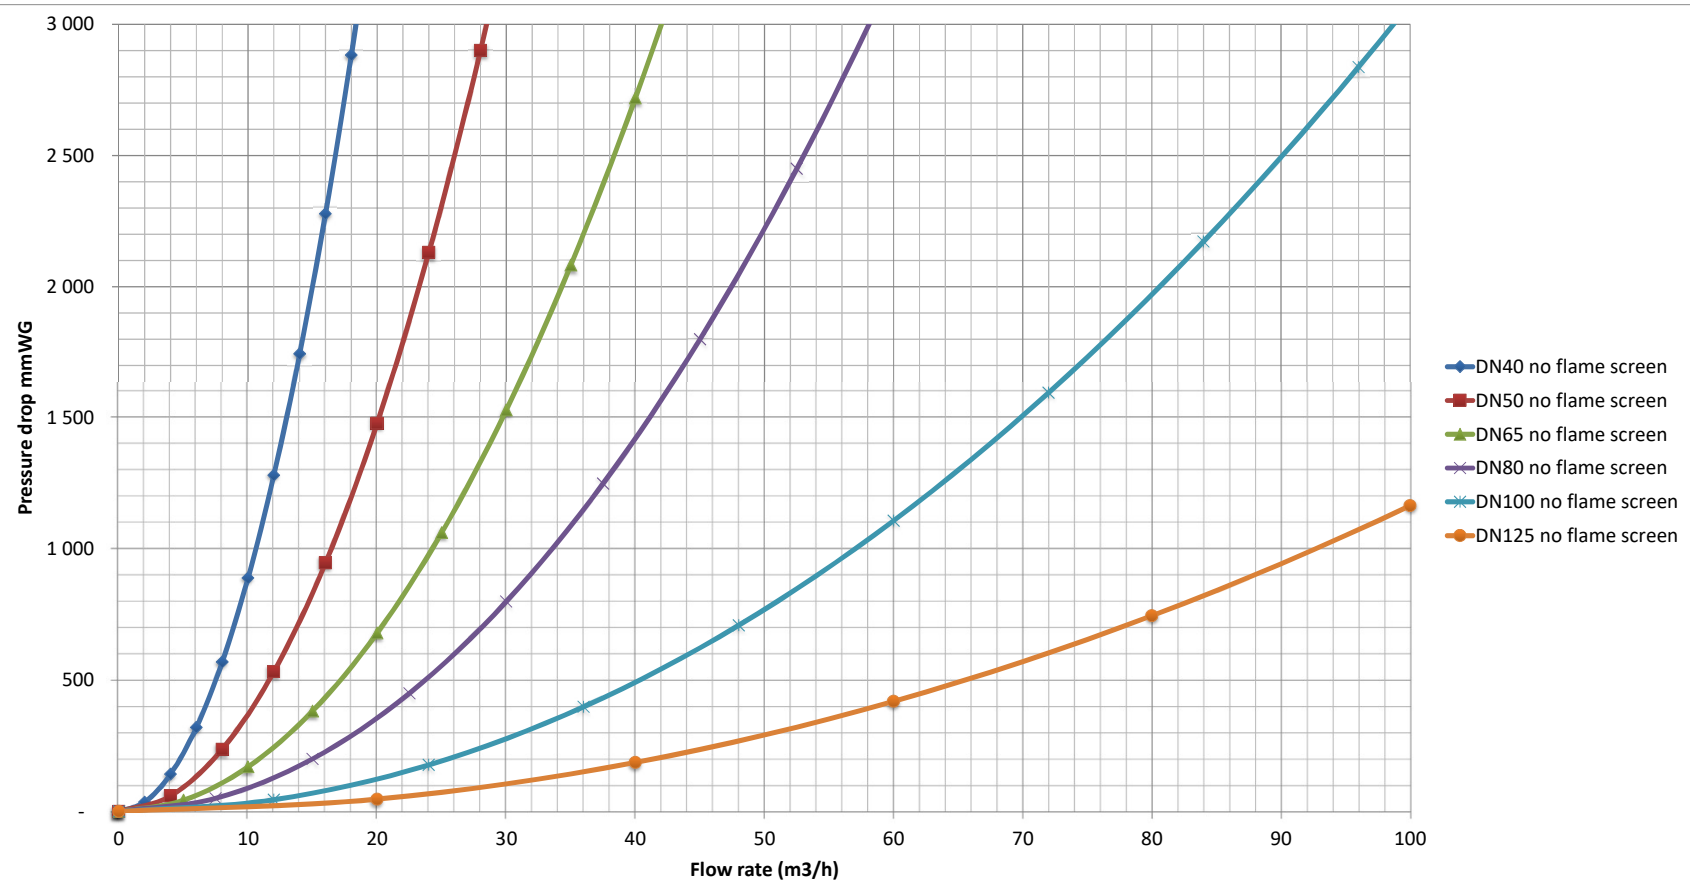

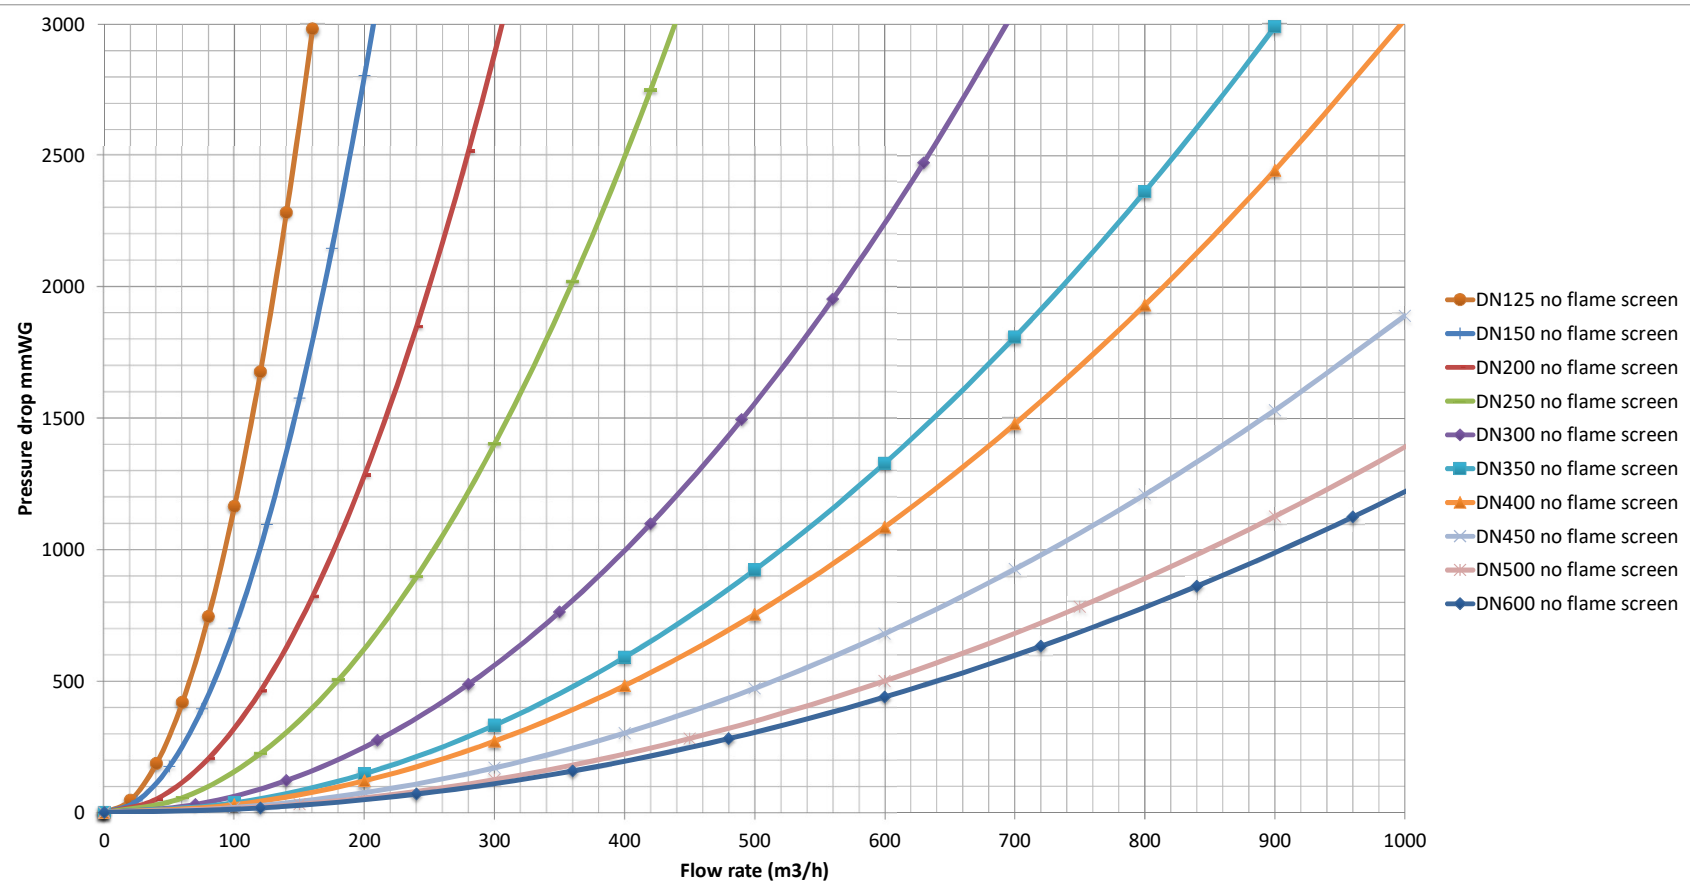

With flame screen

